



Luxurious Media Glass

95-99%
Visual Transparency

75%
Energy Saving



Support
customization



160° view angle



Now and future
latest facade



HD + Up to 95%
transparency



Support play 3D
videos, Pictures, letter



See through display,
Glass+display+control
boxall in one



Easy for installation,
Male+Female connect,
plug and Play




Easy for operation,
Intelligent control
support APP,
Computer, USB



BUILDING CURTAIN WALL



3D DISPLAY SCREEN

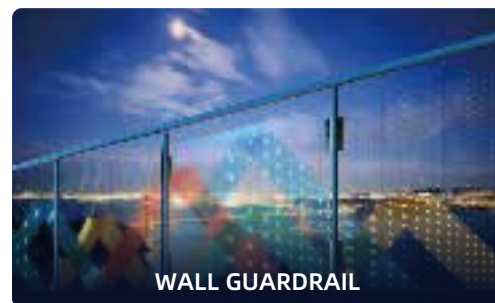

WALL GUARDRAIL

Shenzhen Filmbase Technology Co., Ltd.

Email: info@filmbase.cn **Tel:** +86-755-2850-5346

Address: 31F 3A Building, Smart Park, Baolong street, Longgang district, Shenzhen, China



Product Model

Products	Luxurious 01	Luxurious 02	Luxurious 03	Luxurious 04
Pitch	P4	P5	P6	P8
Screen brightness (nits)*	0~5000	0~5000	0~5000	0~5000
Visual transparency	≥90%	≥90%	≥95%	≥95%
Pixel pitch	4x4mm	5x5mm	6x6mm	8x8mm
Module	W240 x H≤1500	W240 x H≤1500	W240 x H≤1500	W240 x H≤1500
Pixel density	62500	40000	27556	15625
Best view distance	≥4m	≥5m	≥6m	≥8m
Viewing angle	≥160°	≥160°	≥160°	≥160°
Average square power	230W	230W	230W	230W
Maximum square power	650W	650W	650W	650W


*Note: These parameters are based on a standard 1-square-meter white TOP bracket LED display panel as the test sample. Specifications may vary with changes in panel dimensions. Final specifications are subject to project evaluation.

Product Model

Products	Luxurious 05	Luxurious 06	Luxurious 07
Pitch	P10	P15	P20
Screen brightness (nits)*	0~5000	0~4000	0~3000
Visual transparency	≥95%	≥98%	≥98%
Pixel pitch	10x10mm	15.6x15.6mm	20x20mm
Module	W240 x H≤1500	W240 x H≤1500	W240 x H≤1500
Pixel density	10000	4444	2500
Best view distance	≥10m	≥15m	≥20m
Viewing angle	≥160°	≥160°	≥160°
Average square power	230W	200W	140W
Maximum square power	650W	520W	390W

*Note: These parameters are based on a standard 1-square-meter white TOP bracket LED display panel as the test sample. Specifications may vary with changes in panel dimensions. Final specifications are subject to project evaluation.

Structural

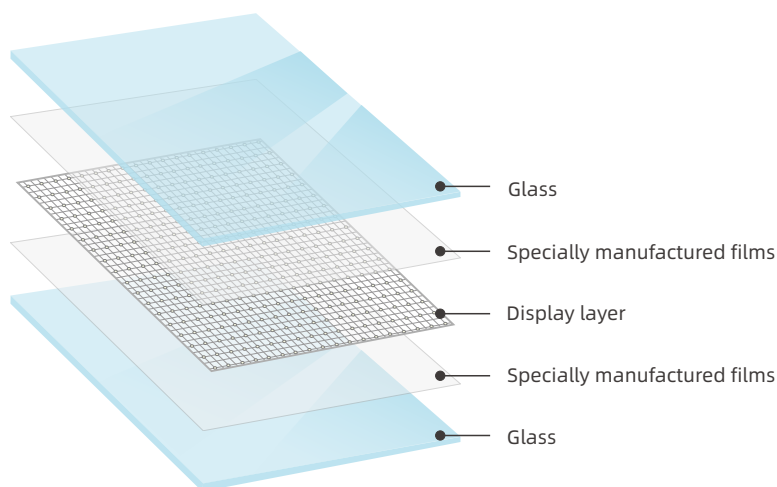

Note: Color and thickness do not represent the actual situation, only for the convenience of illustration.

Technical Parameters

Pixel specification	1R1G1B
Pixel package	SMD2020
Screen material	Tempered Glass
Grayscale level	65536
Refresh rate	≥3840
Brightness adjustment	32X65536
Operating voltage	+5VDC
Working temperature	-20°C~55°C
Storage temperature	-40°C~80°C
Working humidity	10~90%
Storage humidity	5~95%
Control system	Transmitter cards, asynchronous cards, asynchronous playback boxes, video processors

