


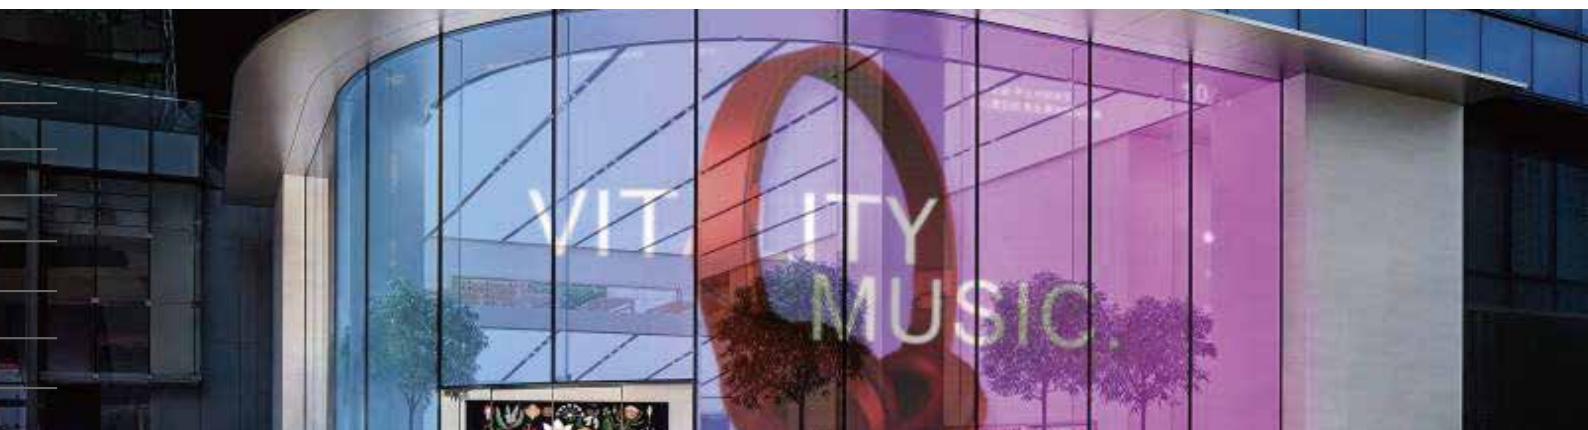


Holographic

invisible display

95-99%
Visual Transparency

75%
Energy Saving

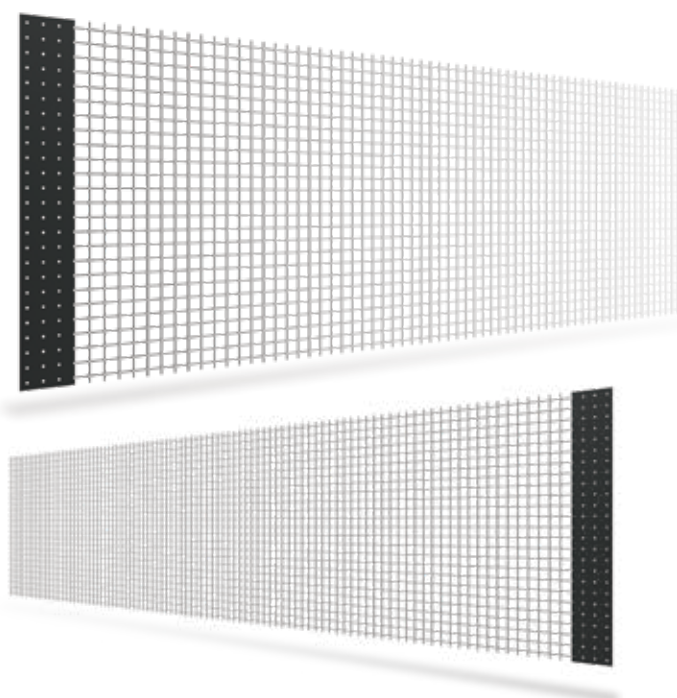

Adjustable high
brightness



High definition
transparent



Crop stitching



Ultra thin 2mm



Easy to install



Multiple displays



Non-destructive
repair



Multiple controls



WINDOW DISPLAY



ART FENCE



URBAN LANDSCAPE

Shenzhen Filmbase Technology Co., Ltd.

Email: info@filmbase.cn **Tel:** +86-755-2850-5346

Address: 31F 3A Building, Smart Park, Baolong street, Longgang district, Shenzhen, China



Product Model

Products	Invisible 01	Invisible 02	Invisible 03	Invisible 04	Invisible 05
Pitch	P4	P5	P6	P8	P10
Screen brightness (nits)*	0~5000	0~5000	0~5000	0~5000	0~5000
Visual transparency	≥90%	≥90%	≥95%	≥95%	≥95%
Pixel pitch	4x4mm	5x5mm	6x6mm	8x8mm	10x10mm
Module	W240xH≤1500	W240xH≤1500	W240xH≤1500	W240xH≤1500	W240xH≤1500
Pixel density	62500	40000	27556	15625	10000
Best view distance	≥4m	≥5m	≥6m	≥8m	≥10m
Viewing angle	≥160°	≥160°	≥160°	≥160°	≥160°
Average square power	230W	230W	230W	230W	230W
Maximum square power	650W	650W	650W	650W	650W


*Note: These parameters are based on a standard 1-square-meter white TOP bracket LED display panel as the test sample. Specifications may vary with changes in panel dimensions. Final specifications are subject to project evaluation.

Product Model

Products	Invisible 06	Invisible 07	Invisible 08	Invisible 09
Pitch	P16	P20	P30	
Screen brightness (nits)*	0~4000	0~3000	0~1200	Consultation Customization
Visual transparency	≥95%	≥98%	≥98%	Consultation Customization
Pixel pitch	15x15mm	20x20mm	30x30mm	Consultation Customization
Module	W240xH≤1500	W240xH≤1500	W240xH≤1500	Consultation Customization
Pixel density	4356	2500	1089	Consultation Customization
Best view distance	≥15m	≥20m	≥30m	Consultation Customization
Viewing angle	≥160°	≥160°	≥160°	≥160°
Average square power	230W	160W	100W	Consultation Customization
Maximum square power	650W	480W	260W	Consultation Customization

*Note: These parameters are based on a standard 1-square-meter white TOP bracket LED display panel as the test sample. Specifications may vary with changes in panel dimensions. Final specifications are subject to project evaluation.

Structural

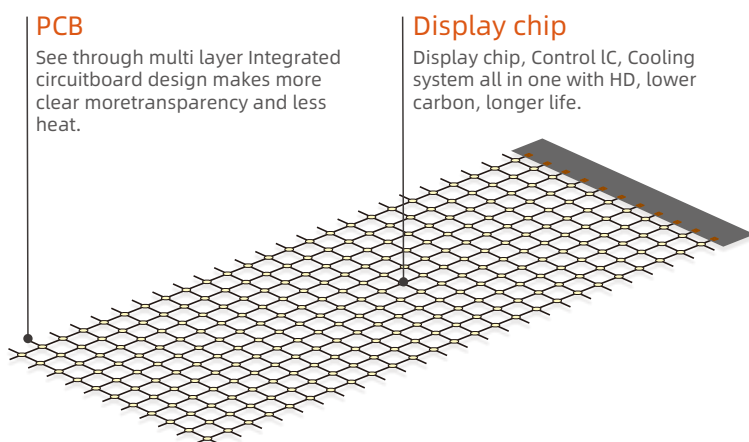

Note: Color and thickness do not represent the actual situation,only for the convenience of illustration.

Technical Parameters

Pixel size	1R1G1B
Pixel packing	1515 / 2020
Color uniformity	±0.003
Grayscale level	65536 levels
Brightness adjustment	32-bit current gain
Drive method	Static state
Refresh rate	3840
Working temperature	-20°C~50°C
Storage temperature	-40°C~70°C
Working humidity	10-90%
Storage humidity	5-95%
Control method	Mobile phone/computer
Support video	Internalstorage/U disk/synchronization
Screen material	Flexible substrate + organic resin

